


## SUPER MATCH - MULTI-SPLIT UNIDADES INTERIORES

# GAMA NEBULA

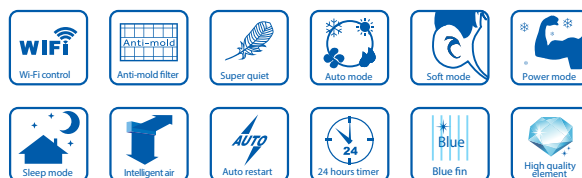

Modelo		AS07NS1HRA-WU	AS09NS1HRA-WU	AS12NS1HRA-WU	AS18NS1HRA-WU	AS24NS1HRA-WU	
Capacidade	Capacidade Arrefecimento	Btu/h(nor)	6800	9210	12290	17740	23890
		kW nominal(min~max)	2	2.7(0.80-3.40)	3.6(1.00-4.20)	5.2(1.30-6.80)	7.0(2.20-8.50)
	Capacidade aquecimento	Btu/h(nor)	7850	9560(4780-10920)	12630(4780-13990)	19790(5460-20480)	25600(8530-26620)
		kW nominal(min~max)	2.3	2.8(1.00-4.60)	3.7(1.100-5.40)	5.8(1.40-6.90)	7.5(2.40-9.80)
	Arrefecimento P design(35 °C)	kW	2.7	2.7	3.6	5.2	7
Aquecimento P design(-10 °C)	kW	2.5	2.5	3.2	4.9	5.1	
Alimentação Elétrica		Ph/V/Hz	1-230-50	1-230-50	1-230-50	1-230-50	1-230-50
Performance	Caudal de Ar (H/M/L)	m³/h	600	600	650	900	1200
	Nível sonoro (H/M/L)	dB(A)	52	52	54	57	62
	Nível Sonoro de Pressão (H/M/L)	dB(A)	39/34/27/21	39/34/27/21	40/35/31/22	47/43/37/30	47/43/37/35
Instalação	Dimensões (W/D/H)	mm	855X204X280	855X204X280	855X204X280	997x235x322	
	Peso	kg	10/12.2	10/12.2	10/12.2	13/16	16/19.6
	Diâmetro Tubagem Liq.	mm	6.35	6.35	6.35	9.52	9.52
	Diâmetro Tubagem Gas	mm	9.52	9.52	9.52	15.88	15.88
	Controlo	Standard		YR-HBS01	YR-HBS01	YR-HBS01	YR-HBS01
Option		Informações sob consulta					